

800-2100nm 0.3mm InGaAs PIN Photodiode

Version: 3.1 17-03-01

Model: LSIPD21-0.3

Features:

- Low noise, High reliability
- 800-2100nm wide wavelength range
- Active diameter 0.3mm
- Hermetic package TO46 Can or with receptacle or with fiber coupling



Applications:

- Gas Analyzer
- Environment measurement
- Optical sensor, Temperature sensing
- Covert IR sensing, Spectrography
- Medical and Chemical analysis
- Optical power meter, Space light detect equipment



Absolute maximum ratings:

parameter	symbol	value	unit
Operating temperature	Top	-40~+85	°C
Storage temperature	Tstg	-50~+125	°C
Forward current	I _f	5	mA
Reverse voltage	V _R	3	V
Soldering temperature(time)	T _s (10s)	260	°C

Electrical and optical characteristics:(T=25°C)

parameter	symbol	unit	Value (typ.)
Active diameter	Φ	mm	0.3
Spectral range	λ	nm	800-2100
Responsivity	Re (V _R =2V,λ=850nm)	mA/mW	0.23
	Re (V _R =2V,λ=1310nm)	mA/mW	0.7
	Re(V _R =2V,λ=1850nm)	mA/mW	1.2
	Re(V _R =2V,λ=2100nm)	mA/mW	0.9
Response time	Tr (R _L =50Ω, V _R =2V)	ns	3
Dark current	I _D (V _R =0V)	nA	2
	I _D (V _R =2V)	nA	20
Reverse Breakdown voltage	V _{BR} (I _R =10uA)	V	6
Junction capacitance	C _j (f=1MHz, V _R =0V)	pF	90
	C _j (f=1MHz, V _R =2V)	pF	18
Saturated Optical Power	Ps(V _R =2V)	mW	4
Operating voltage	V _R	V	0-2
Shunt impedance	Rsh (V _R =10mV)	MΩ	5
package	Hermetic package TO46 Can or with receptacle or fiber coupling		

NOTICE: The above product specifications are subject to change without notice.

地址: 北京市海淀区苏州街 12 号西屋国际 E 座 1201 邮编: 100080


Address: Building E Rm 1201, Westing house, No 12 Suzhou Street,, Haidian District, Beijing 100080, China.

TEL: +86-010-82873449 FAX: +86-010-62557230 Email: info@lightsensing.com Website: www.lightsensing.com

The typical Sensitivity curve



TO package and Lead

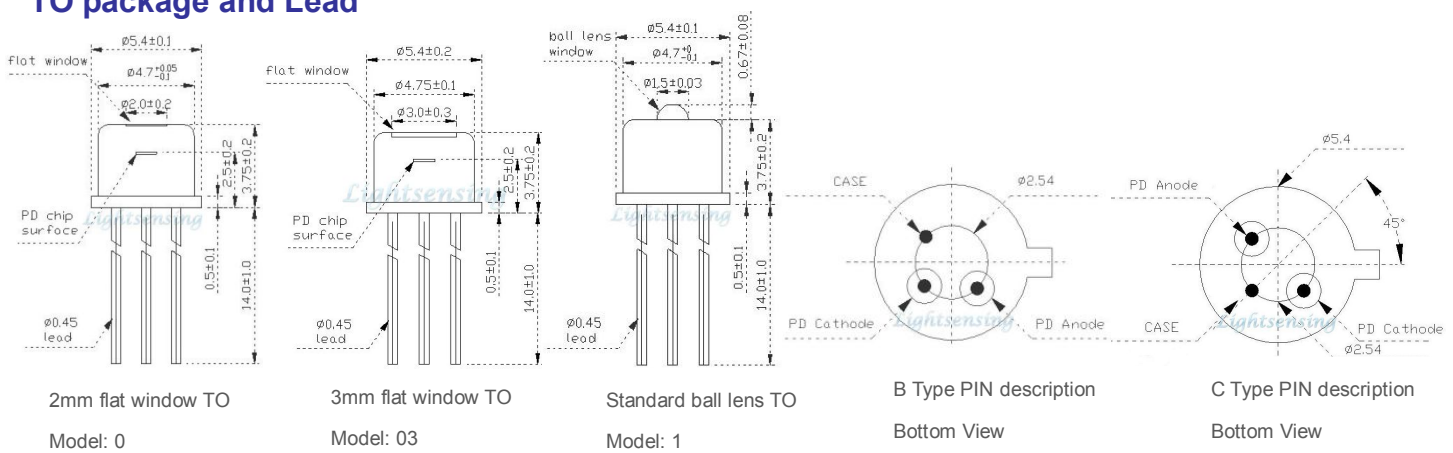

Note: In order to get other dimensions, please contact us.

Order information

LSIPD21-0.3-X-X	X=0	TO-46 Can with 2mm flat window cap
	X=03	TO-46 Can with 3mm flat window cap
B=B Type PIN description	X=1	TO-46 Can with ball lens cap
	X=SMFA/P	TO-46 Can with SM Fiber coupling with FC-APC/FC-PC connector
C=C Type PIN description	X=SMSA	TO-46 Can with SM Fiber coupling with SC-APC connector
	X=5MMFA/P	TO-46 Can with 50um MM Fiber coupling with FC-APC/FC-PC connector
	X=6MMFA/P	TO-46 Can with 62.5um MM Fiber coupling with FC-APC/FC-PC connector
	X=10MMFA/P	TO-46 Can with 105um MM Fiber coupling with FC-APC/FC-PC connector
	X=20MMFA/P	TO-46 Can with 200um MM Fiber coupling with FC-APC/FC-PC connector
	X=2JKFC	TO-46 Can with fixed receptacle with FC connector and 2 pieces of fix holes
	X=4JKFC	TO-46 Can with fixed receptacle with FC connector and 4 pieces of fix holes
	X=Other	By customer's request

The cautions

- 1: The above product specifications are subject to change without notice.
- 2: The suitable ESD protecting measures are recommend in storage,transporting and using.
- 3: The fiber bending radius no less than 20mm for avoiding fiber damaged ,Be sure the fiber coupling facet is clean before connecting it to opto-circuit.

地址: 北京市海淀区苏州街 12 号西屋国际 E 座 1201 邮编: 100080

Address: Building E Rm 1201, Westing house, No 12 Suzhou Street,, Haidian District, Beijing 100080, China.

TEL: +86-010-82873449 FAX: +86-010-62557230 Email: info@lightsensing.com Website: www.lightsensing.com